


BI20U-CK40-VP4X2-H1141

Inductive Sensor – With Extended Switching Distance

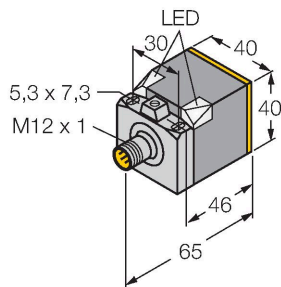


Features

- Rectangular, height 40 mm
- Variable orientation of active face in 5 directions
- Plastic, PBT-GF30-V0
- High luminance corner LEDs
- Optimum view on supply voltage and switching state from any position
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Large coverage
- High switching frequency
- DC 4-wire, 10...65 VDC
- Changeover contact, PNP output
- M12 x 1 male connector

Technical data

| | |
|---|------------------------------------|
| Type | BI20U-CK40-VP4X2-H1141 |
| ID | 1627216 |
| General data | |
| Rated switching distance | 20 mm |
| Mounting conditions | Flush |
| Secured operating distance | $\leq (0.81 \times S_n)$ mm |
| Repeat accuracy | ≤ 2 % of full scale |
| Temperature drift | $\leq \pm 10$ % |
| Hysteresis | 3...15 % |
| Electrical data | |
| Operating voltage | 10...65 VDC |
| Residual ripple | ≤ 10 % U_{ss} |
| DC rated operational current | ≤ 200 mA |
| No-load current | 15 mA |
| Residual current | ≤ 0.1 mA |
| Isolation test voltage | ≤ 0.5 kV |
| Short-circuit protection | yes / Cyclic |
| Voltage drop at I_o | ≤ 1.8 V |
| Wire breakage/Reverse polarity protection | yes / Complete |
| Output function | 4-wire, Complementary contact, PNP |
| DC field stability | 300 mT |
| AC field stability | 300 mT _{ss} |
| Insulation class | □ |
| Switching frequency | 0.25 kHz |
| Mechanical data | |
| Design | Rectangular, CK40 |

Wiring diagram



Functional principle


Inductive sensors are designed for wear-free and contactless detection of metal objects. proxx+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.

Technical data

| | |
|---------------------------------|---|
| Dimensions | 65 x 40 x 40 mm |
| | variable orientation of active face in 5 directions |
| Housing material | Plastic, PBT-GF20-V0, Black |
| Active area material | Plastic, PA12-GF30, yellow |
| Electrical connection | Connector, M12 × 1 |
| Environmental conditions | |
| Ambient temperature | -30...+85 °C |
| Vibration resistance | 55 Hz (1 mm) |
| Shock resistance | 30 g (11 ms) |
| Protection class | IP68 |
| MTTF | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Power-on indication | 2 × LEDs, Green |
| Switching state | 2 × LEDs, Yellow |
| Included in delivery | BS1-CK40 |

Mounting instructions

Mounting instructions/Description

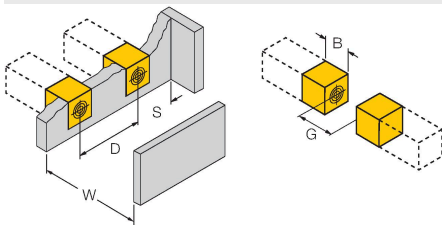


| | |
|---------------------|--------|
| Distance D | 80 mm |
| Distance W | 60 mm |
| Distance S | 40 mm |
| Distance G | 120 mm |
| Width active area B | 40 mm |

Accessories

BSS-CP40

6901318

Mounting clamp for rectangular housings 40 x 40 mm; material: Polypropylene



Accessories

| Dimension drawing | Type | ID | |
|-------------------|---------------|---------|--|
| | RKC4.4T-2/TEL | 6625013 | Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com |

