

# Managed Ethernet Switch with Routing Functionality

## L210-F2G

- ⌘ Compact Industrial Ethernet switch design
  - Flexible SFP transceiver design
  - Advanced WeOS Layer 3 functionality
  - Low power consumption
- ⌘ Designed for use in industrial applications
  - Dual 9.8 – 60 VDC power input
  - Highly configurable fault I/O contact
  - Robust metal DIN rail housing
- ⌘ Robust for long service life
  - 630,000 hours MTBF to MIL-HDBK-217K
  - -40 up to +74°C (-40 to +165°F) with no moving parts
  - Industrial EMC, shock and vibration testing
- ⌘ Unique future proof industrial networking solutions
  - Simple web configuration with professional CLI
  - Network IP Security and remote access
  - Multiple network resilience solutions



**EN 61000-6-1**  
Residential Immunity

**EN 61000-6-2**  
Industrial Immunity

**EN 61000-6-4**  
Industrial Emission

**EN 50121-4**  
Railway Trackside

**NEMA TS 2**  
Traffic Controller Assemblies  
with NTCP Requirements

The Lynx 210 is a layer 3 industrial Ethernet switch, powered by the Westermo WeOS network operating system. Lynx is the most compact and has the lowest power requirements in this class of switch. Lynx has 8 10/100 Mbit/s ports in addition to 2 ports which can be fitted with Gbit or 100 Mbit SFP transceivers.

The Lynx is designed for simple use in industrial applications, from the robust DIN rail clip solution to the configurable fault contact and the industrial level dual power inputs.

Only industrial grade components are used which gives the Lynx an MTBF of 630,000 hours and ensures a long service life. A wide operating temperature range of -40 up to +74°C (-40 to +165°F) can be achieved with no moving parts or cooling holes in the case. Lynx has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside application.


WeOS has been developed by Westermo to allow us to offer cross platform and future proof solutions. WeOS can deliver unique IP security functionality for this class of product, for instance a Multiport DMZ can be constructed by utilising the internal port based firewall function. Remote secure access to a network can be provided using encrypted VPNs. *For more WeOS functionality please see the WeOS datasheet.*

### Ordering Information

Art.no	Description
3643-0105	L210-F2G, Managed Ethernet Switch with Routing Functionality
3643-0115	L210-F2G-12VDC, Managed Ethernet Switch with Routing Functionality
1211-2027	CLI Cable (Console) (Accessories)
3125-0001	PS-30, Power supply, DIN mounted (Accessories)

# Specifications L210-F2G

## Dimensional drawing

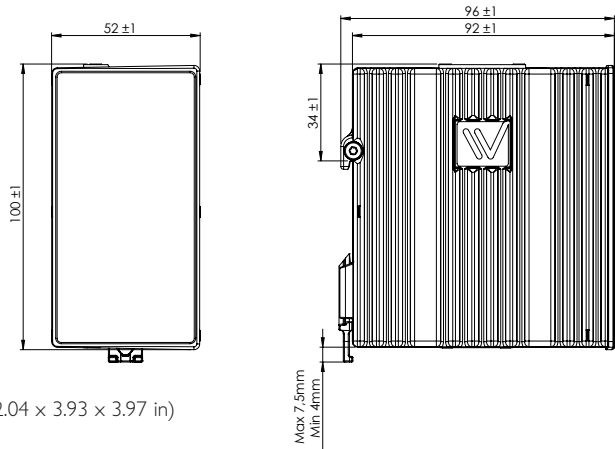

Dimension W x H x D 52 x 100 x 101 mm (2.04 x 3.93 x 3.97 in)

Weight 0,7 kg

Degree of protection IP40

### Power

<b>L210-F2G</b>	Rated voltage	24 to 48 VDC
	Operating voltage	19 to 60 VDC
	Rated current	240 mA @ 24 VDC 120 mA @ 48 VDC
L210-F2G-12VDC	Rated voltage	12 to 48 VDC
	Operating voltage	9.8 to 60 VDC
	Rated current	420 mA @ 12 VDC 220 mA @ 24 VDC 115 mA @ 48 VDC

### Interfaces

Ethernet TX	8 x RJ-45, 10 Mbit/s, 100 Mbit/s,
Ethernet SFP pluggable connections (FX or TX)	2 x 100 Mbit/s or 1000 Mbit/s transceivers supported
Digital I/O	1 x 4-position detachable screw terminal
Console	1 x 1 x 2.5 mm jack, use Westermo cable 1211-2027

### Temperature

Operating	<b>L210-F2G:</b> -40 to +70°C (-40 to +158°F) L210-F2G-12VDC: -40 to +74°C (-40 to +165°F)
Storage & Transport	-50 to +85°C (-58 to +185°F)

### Agency approvals and standards compliance

EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-4, Emission industrial environments
	EN 50121-4, Railway signalling and telecommunications apparatus
	IEC 62236-4, Railway signalling and telecommunications apparatus
Safety	UL/IEC/EN 60950-1, IT equipment
Marine	DNV GL rules for classification – Ships and offshore units*
Environmental	NEMA TS 2, Traffic Controller Assemblies with NTCIP Requirements**

\*Only L210-F2G

\*\*Only L210-F2G-12VDC